


Semi model type DBS with CW1/CW2
To Excavators in the class 4-15 ton



Intended for digging grooves, slots and other narrow excavation activities

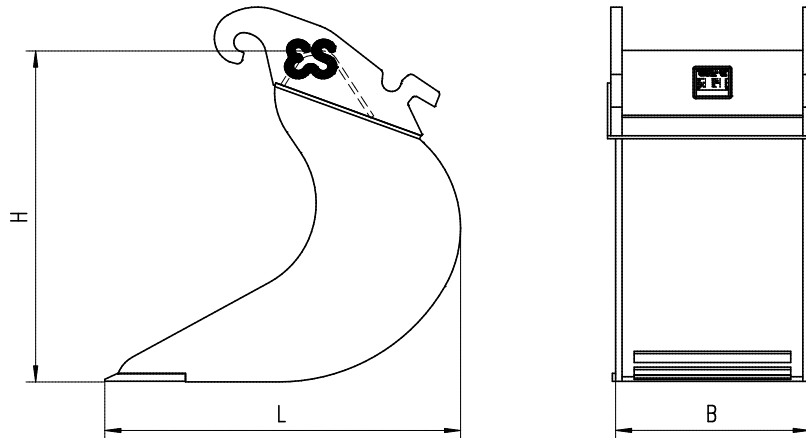

Bucket type	B (mm)	L (mm)	H (mm)	Capacity (1:1)	Weight (kg)
DBS.1.020.0400	400	658	619	94 ltr.	84 kg
DBS.1.025.0350	350	728	681	98 ltr.	89 kg
DBS.1.025.0400	400	728	681	116 ltr.	94 kg
DBS.1.030.0350	350	784	738	115 ltr.	98 kg
DBS.1.030.0400	400	784	738	135 ltr.	110 kg
DBS.1.030.0500	500	784	738	176 ltr.	123 kg
DBS.1.035.0350	350	845	823	130 ltr.	135 kg
DBS.1.035.0400	400	845	823	153 ltr.	142 kg
DBS.1.035.0450	450	845	823	176 ltr.	150 kg
DBS.1.035.0500	500	845	823	200 ltr.	157 kg
DBS.1.040.0400	400	906	878	173 ltr.	153 kg
DBS.1.040.0500	500	906	878	227 ltr.	170 kg
DBS.2.045.0500	500	956	924	254 ltr.	244 kg
DBS.2.050.0500	500	1005	967	273 ltr.	287 kg
DBS.2.050.0600	600	1005	967	341 ltr.	296 kg
DBS.2.055.0500	500	1054	1008	299 ltr.	314 kg
DBS.2.055.0600	600	1054	1008	373 ltr.	326 kg
DBS.2.060.0500	500	1102	1038	325 ltr.	325 kg
DBS.2.060.0600	600	1102	1038	405 ltr.	340 kg

Characteristics of Trenching bucket semi model:

- Intended for digging narrow trenches and other narrow excavation activities
- Available with different suspensions: Standard, Quick Twin, Pin-on or specials
- Several other versions and widths possible on request

Eurosteel BV

Van Heemskerckweg 10
5928 LL Venlo
The Netherlands
T: +31 (0)77 387 60 60
F: +31 (0)77 382 49 47
E: info@eurosteel.nl