



General Purpose type DO with CW45/CW55

To Excavators in the class 27-60 ton

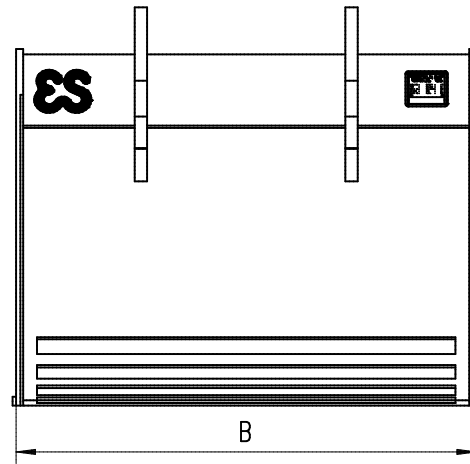

Intended for standard excavation activities

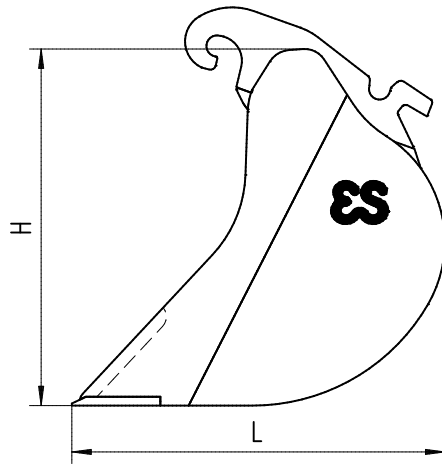

Bucket type	B (mm)	L (mm)	H (mm)	Capacity (1:1)	Weight (kg)
DO.45.105.1400	1400	1511	1354	1825 ltr.	1150 kg
DO.45.105.1500	1500	1511	1354	1975 ltr.	1200 kg
DO.45.105.1600	1600	1511	1354	2125 ltr.	1250 kg
DO.45.125.1400	1400	1661	1458	2125 ltr.	1340 kg
DO.45.125.1500	1500	1661	1458	2300 ltr.	1395 kg
DO.45.125.1600	1600	1661	1458	2475 ltr.	1450 kg
DO.45.145.1600	1600	1718	1633	2850 ltr.	1790 kg
DO.5.125.1500	1500	1661	1468	2300 ltr.	1445 kg
DO.5.125.1600	1600	1661	1468	2478 ltr.	1505 kg
DO.5.145.1400	1400	1718	1633	2440 ltr.	1730 kg
DO.5.145.1500	1500	1718	1633	2650 ltr.	1800 kg
DO.5.145.1600	1600	1718	1633	2860 ltr.	1870 kg
DO.5.145.1700	1700	1718	1633	3070 ltr.	1935 kg
DO.5.145.1800	1800	1718	1633	3280 ltr.	2005 kg
DO.5.160.1900	1900	1871	1670	3880 ltr.	2310 kg

Characteristics of Excavation Bucket

general purpose:

- Intended for standard excavation activities (Density < 1,8 kg/liter)
- Ideal form for good loading and dumping properties
- Available with different suspensions: Standard, Quick Twin, Pin-on or specials
- Several other versions and widths possible on request

Eurosteel BV

Van Heemskerckweg 10
5928 LL Venlo
The Netherlands
T: +31 (0)77 387 60 60
F: +31 (0)77 382 49 47
E: info@eurosteel.nl