


# General Purpose type PFG with CW3/CW4


To Excavators in the class 15-32 ton




**Intended for quick and easy transfer of  
several materials**



**Standard  
model**

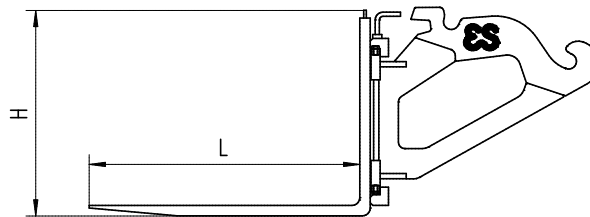

**Quick Twin  
model**

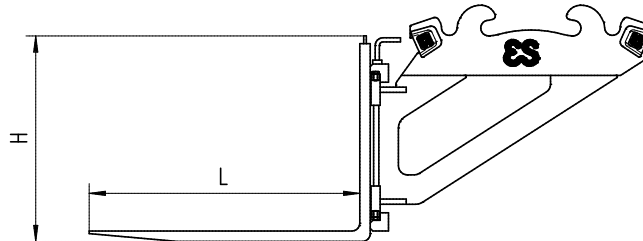

Type	B (mm)	L (mm)	H (mm)	Load (max)	Weight (kg)
PFG.3.1200.1200	1200	1200	800	4600 kg	440 kg
PFG.3.1200.120Q	1200	1200	800	4600 kg	450 kg
PFG.3.1200.1500	1200	1500	800	4600 kg	470 kg
PFG.3.1200.150Q	1200	1500	800	4600 kg	480 kg
PFG.3.1600.1500	1600	1500	800	4600 kg	510 kg
PFG.3.1600.150Q	1600	1500	800	4600 kg	520 kg
PFG.4.1600.1500	1600	1500	800	5800 kg	605 kg
PFG.4.1600.150Q	1600	1500	800	5800 kg	615 kg
PFG.5.1600.1500	1600	1500	1000	7000 kg	795 kg
PFG.5.1600.150Q	1600	1500	1000	7000 kg	810 kg

## Characteristics of Palletfork general purpose:

- Intended for quick and easy transfer of several materials
- Strong construction of high quality materials leads to low maintenance and longer lifetime
- Available with universal fork lengths for proper functionality
- Performable with various suspensions like Quick Twin, fixed connection or specials
- Several versions and widths possible on request

### Eurosteel BV

Van Heemskerckweg 10

5928 LL Venlo

The Netherlands

T: +31 (0)77 387 60 60

F: +31 (0)77 382 49 47

E: info@eurosteel.nl