


General Purpose type PFG with CW1/CW2


To Excavators in the class 4-15 ton




**Intended for quick and easy transfer of
several materials**



Standard model

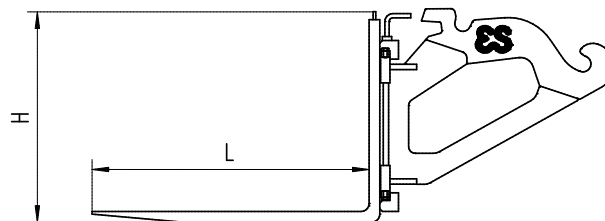

Quick Twin model

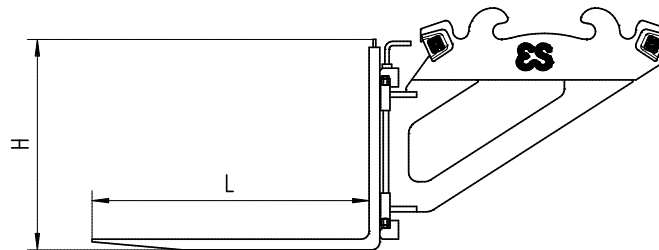

Type	B (mm)	L (mm)	H (mm)	Load (max)	Weight (kg)
PFG.1.0900.0800	900	800	595	2000 kg	170 kg
PFG.1.0900.1000	900	1000	595	2000 kg	180 kg
PFG.1.0900.100Q	900	1000	595	2000 kg	195 kg
PFG.1.0900.1200	900	1200	665	2500 kg	225 kg
PFG.1B.1200.120	1200	1200	800	3000 kg	355 kg
PFG.2.1200.1000	1200	1000	800	3000 kg	380 kg
PFG.2.1200.1200	1200	1200	800	3000 kg	395 kg
PFG.2.1200.120Q	1200	1200	800	3000 kg	405 kg

Characteristics of Palletfork general purpose:

- Intended for quick and easy transfer of several materials
- Strong construction of high quality materials leads to low maintenance and longer lifetime
- Available with universal fork lengths for proper functionality
- Performable with various suspensions like Quick Twin, fixed connection or specials
- Several versions and widths possible on request

Eurosteel BV
Van Heemskerckweg 10
5928 LL Venlo
The Netherlands
T: +31 (0)77 387 60 60
F: +31 (0)77 382 49 47
E: info@eurosteel.nl